PRODUCT GUIDE

Materials & Specs & Applications

# RAPID DEPLOYMENT BARRIER

# BROCHURE

Hebei Jinshi Industrial Metal Co., Ltd.

# JINSHI PRODUCT GUIDE

## Rapid Deployment Barrier

Rapid Deployment Barrier, also called razor wire deployment system, is composed of razor wire deployment system and multiple layer of razor wires. It is a security measure which is specially designed for riots, stability, borders, battlefields and road isolation.

> It features fast protection and rapid deployment isolation. It is regarded as the serious obstacle for rebels, demonstrators and vehicles.

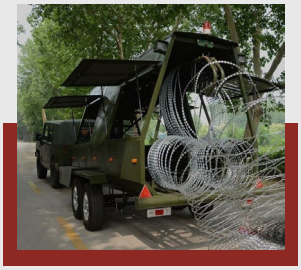

# Why Choose Our Rapid Deployment Barrier?

**Fast deployment**

Deployment 100 meters within 20 seconds and can be recovered within 4 minutes.

**Automatic recovery**

Razor wire trailer has automatic recovery function to save time and labor cost.

**Save space**

The traction part can be folded or disassembled to save space.

**Brushless motor**

It makes driving quieter and extends the life of the motor.

**5 Unit Free**

5 units of work clothes, gloves (stainless steel gloves available), tool box and first aid kit can be supplied for safe operation.

Manual buttons and remote control options of control system.

Oil disc brake and electric brake functions

Searchlights, turn signals, tail warning lights, and warning lights on the top increase the safety factor.

Using solar panel charging and DC charging to work.

All steel parts on the razor wire trailer are treated with military phosphating technology to prolong the service life of products.

# 3D Razor Wire Deployment System

Three coils of razor wire which is placed two coils at the bottom and one coil on the top.
Bottom coil diameter is 730 mm and top coil diameter is 980 mm.

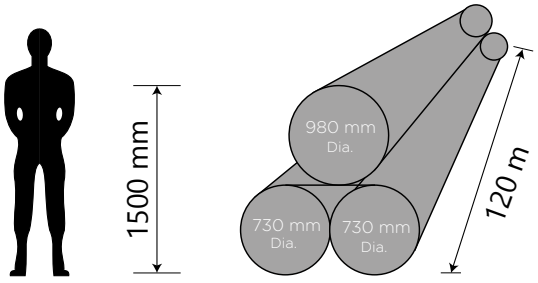


**Razor wire**

**Core wire diameter:** 2.5 mm
**Zinc coating weight:** 275 g/m$^2$
**Blade thickness:** 0.5 mm
**Coil diameter:**
Bottom coil: 730 mm
Top coil: 980 mm
Weight: 520 kg
**Deployment height:** 1500 mm
**Deployment width:** 1500 mm
**Deployment length:** 120 m

**Deployment trailer**

**Length:** 5.8 m
**Width:** 2.0 m
**Height:** 2.6 m
**Weight:** 1300 kg

# 6D Razor Wire Deployment System

It is composed of deployment trailer and six coils of razor wire. Three coils of 630 mm razor wire at the bottom, two coils of 730 mm razor wire in the middle layer and one coil of 980 mm razor wire at the top.

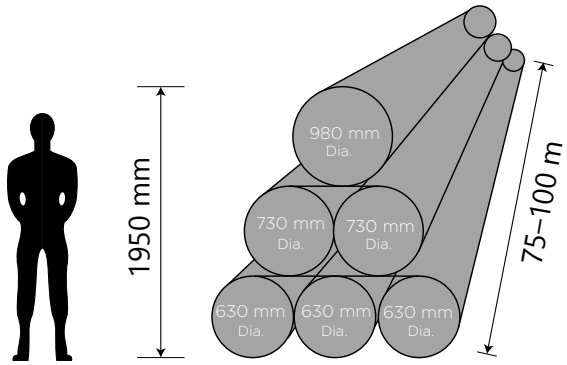


**Razor wire**

**Core wire diameter:** 2.5 mm
**Zinc coating weight:** 275 g/m$^2$
**Blade thickness:** 0.5 mm
**Coil diameter:**
Bottom coil: 630 mm
Middle layer coil: 730 mm
Top coil: 980 mm
**Deployment height:** 1950 mm
**Deployment width:** 1950 mm
**Deployment length:** 75–100 m

**Deployment trailer**

**Length:** 5.8 m
**Width:** 2.15 m
**Height:** 3.18 m
**Weight:** 1300 kg

# Loading

### 3D razor wire deployment System

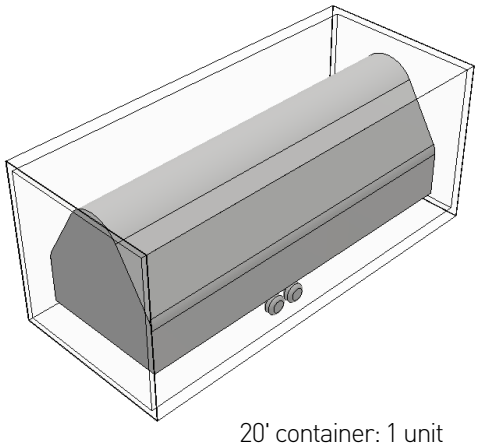

20' container: 1 unit

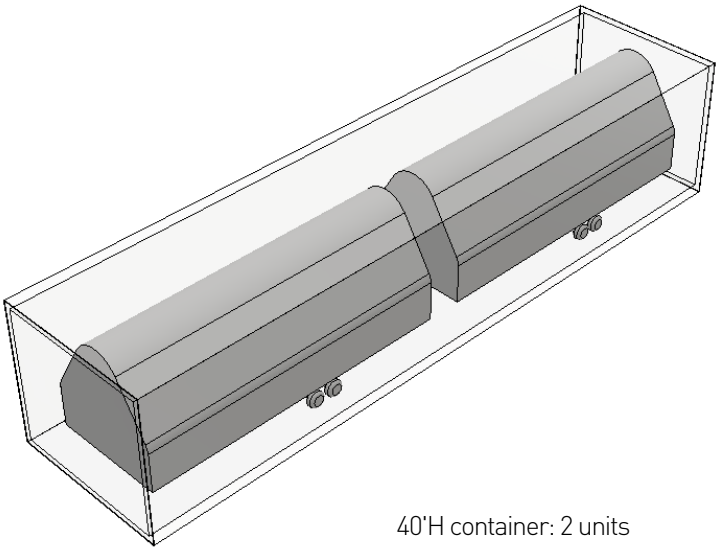

40'H container: 2 units

### 6D razor wire deployment System

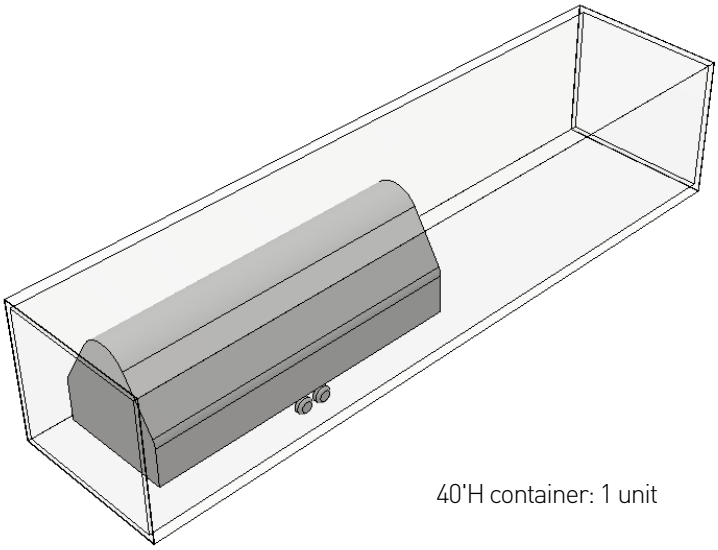

40'H container: 1 unit

# Applications

> Rapid deployment barrier is specially designed for riots, stability, borders, battlefields and road isolation.

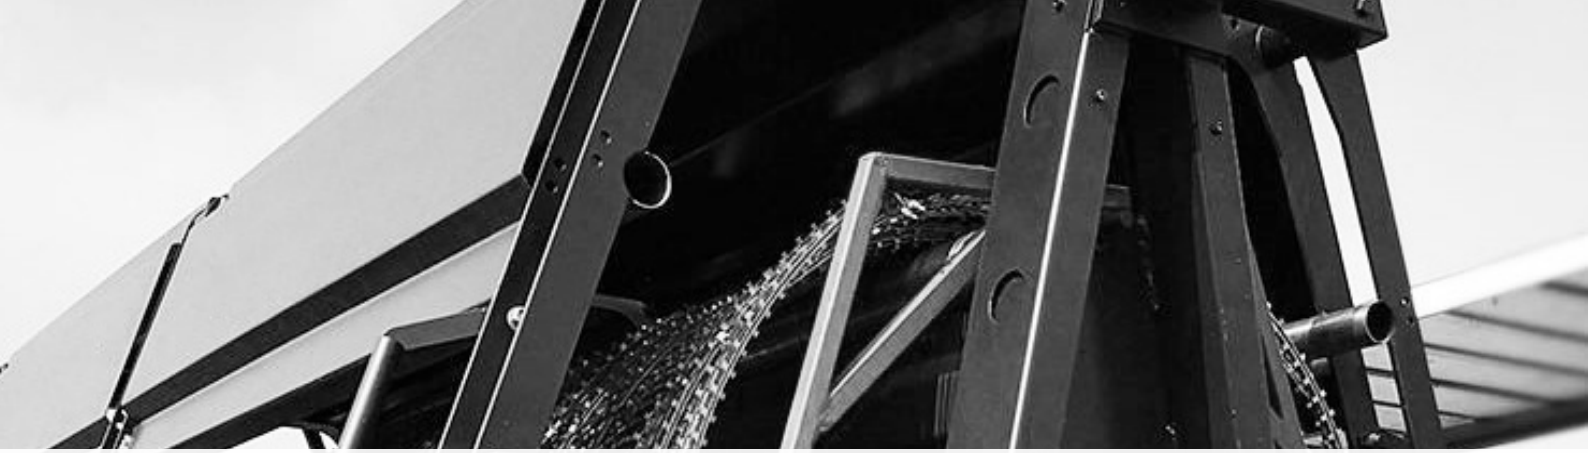

## Hebei Jinshi Industrial Metal Co., Ltd.


**Export Dept:** Tianlin building, Shijiazhuang City, China.

**Factory:** Opposite of Huangcheng Town Government, Anping, Hebei, China.

**Mobile:** +86-15903315260

**Fax:** +86-311-87880711

**Web:** https://www.barbedwiresupplier.com

**E-mail:** sales@barbedwiresupplier.com


HB JINSHI